# Counterweights

with Innviromass Technology

### **Features**

- Weight ranges from 9.5lbs to 52lbs
- Thickness ranges from 0.4 to 1.0
- Length ranges from 7.0 to 38.0
- Secondary cutting operations available
- No slip glue strip
- Notched for easy installation



### **Our Capabilities**

- Punching
- Milling
- Drilling

### **Innviromass Technology**


- Low Cost
- 100% Recycled
- Custom Fit

### The Eco-Friendly Counterweight.

Innviromass ™ provides custom, low-cost counterweight solutions for a broad range of markets. Utilizing 100% recycled materials, our counterweight is an eco-friendly option compared to lead and steel with prices that are much less volatile. Innviromass takes up less space while holding high density & heavy weight to keep you safe.

## Counterweight • Details

### **Applications**

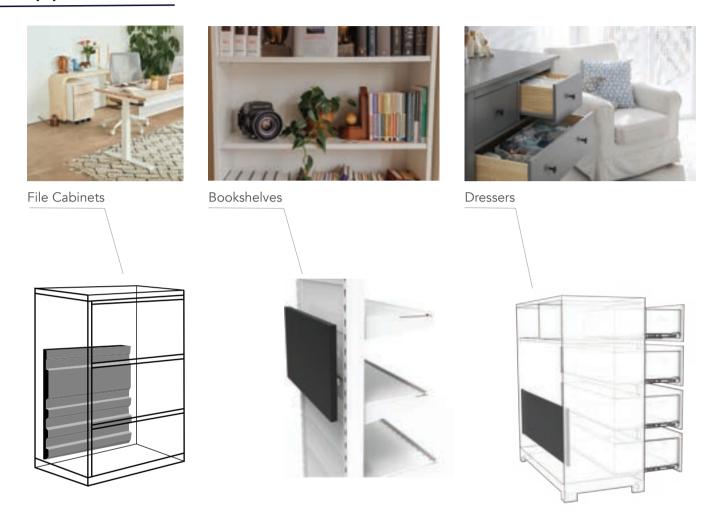

### Compliance

Our Innvironass counterweights have been a trusted solution for the commercial office industry since 2008. We help our clients achieve or exceed industry standards such as BIFMA & ASTM while reducing cost! With a low carbon footprint, these sheets can help you meet criteria for sustainability certifications, such as LEED and Envision, and comply with requirements for the STURDY act as well as meeting the guidelines of the Consumer Product Safety Commission (CPSC).



# Counterweight • Details

### **Product Data**

Product Type	Standard Cut	Part Width	Standard Thickness (In.)	Weights (LB)	Pound per inch cut length (LB/IN)
A	20.420 26.420 32.420 38.420	11.000	0.750 0.750 0.750 0.750	20.900 26.900 32.900 38.900	.791
В	9.840 12.000	17.250	1.000 1.000	20.000 24.000	2.000
С	7.000 27.250 37.500	22.460	0.555 0.555 0.555	9.500 38.000 52.000	1.136
D	8.125 11.750 26.420 32.420 38.420	22.500	0.450 0.450 0.450 0.450 0.450	9.750 14.250 30.000 40.000 43.000	1.357
Е	10.750 15.125	23.375	0.815 0.815	24.000 36.000	2.291
F	7.875	23.375	0.940	30.000	1.772
G	7.6 10.3	23.375	0.59 0.59	13.63 18.29	2.609

